MPIK, Heidelberg, April 21st, 2017

The DAMIC experiment: searching for WIMPs and beyond with CCDs

Paolo Privitera


HE UNIVERSITY OF CHICAL SCIENCES

The Enrico Fermi Institute

(Photo image: particle tracks in a DAMIC CCD)

DAMIC

Dark Matter WIMPs 101

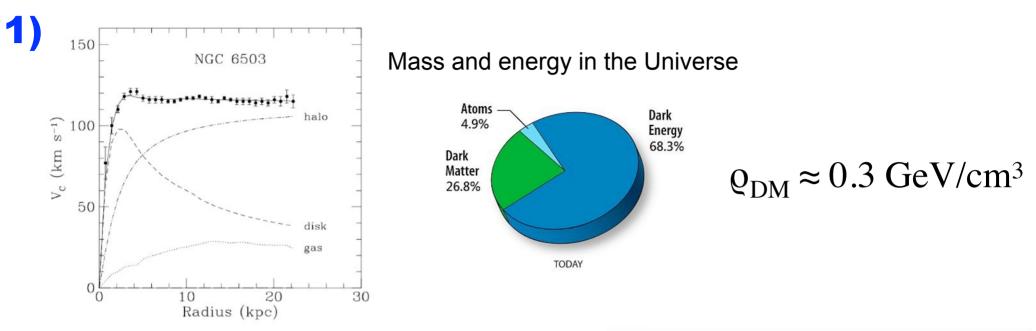



Astrophysical evidence for DM: Galaxy rotation curve, lensing , CMB

2) WIMP "miracle":

a Weakly Interacting Massive Particle in thermal equilibrium with SM particles in the early universe. To give the observed DM density, interactions and masses must be close to weak-scale


$$<\sigma v > \approx 3 \times 10^{-26} \text{ cm}^3/\text{s} \approx 1 / (20 \text{ TeV})^2$$

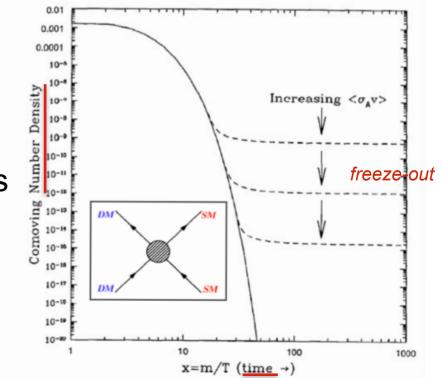

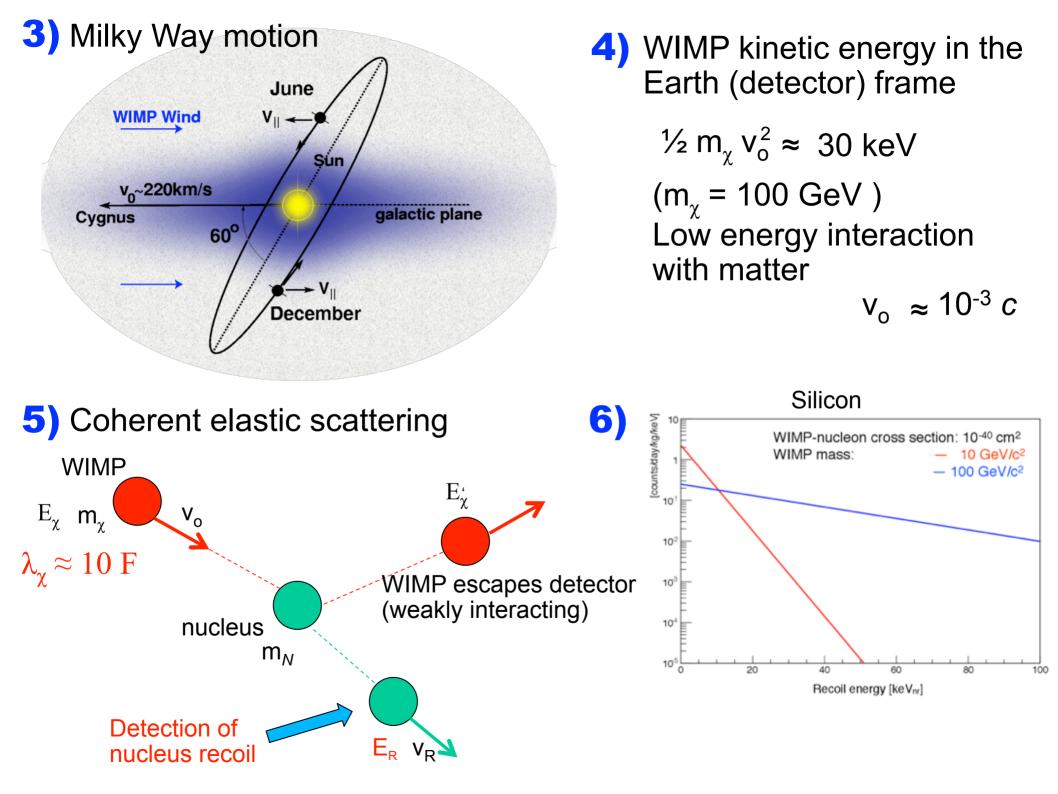


Experimental challenges

- Massive target-detector
- Ultra-pure target (radioactive contaminants)
- Low energy threshold (tens of keV vs MeV in neutrino physics)
- Low background (deep underground; material screening and selection)

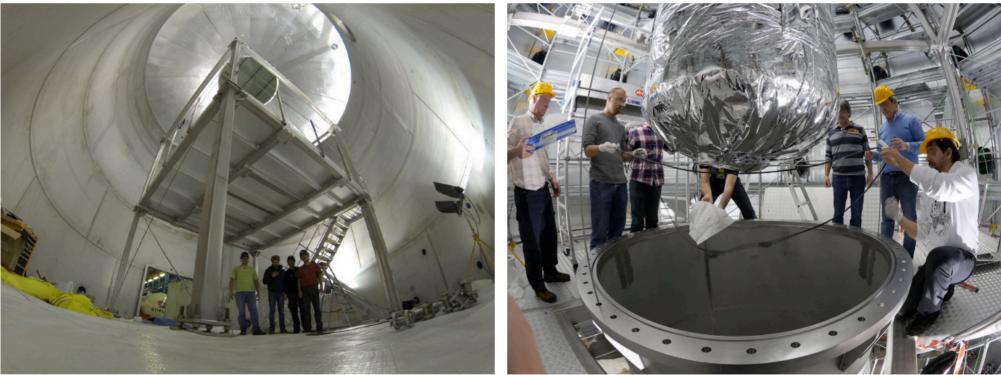


Cryostat support in the Veto water tank Xenon 1T Cryostat

7) Nuclear recoil ionization efficiency (quenching factor)

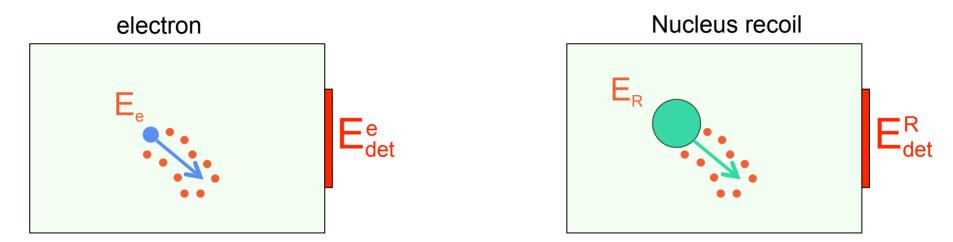


Take a nucleus and an electron of the same energy ($E_R = E_e$).

In general, $E_{det}^{R} < E_{det}^{e}$ (the nucleus dissipates its energy through mechanisms other than ionization) "Lindhard theory"

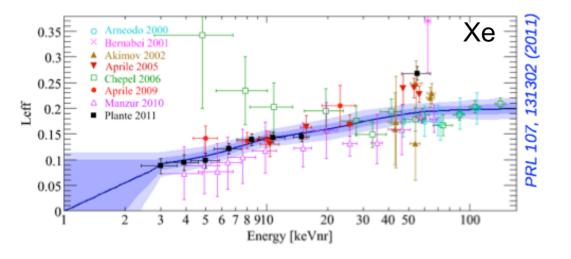


For a given detector ("electron") energy threshold, the nuclear recoil energy threshold depends on the QF. Essential to measure.


WIMP exclusion plot

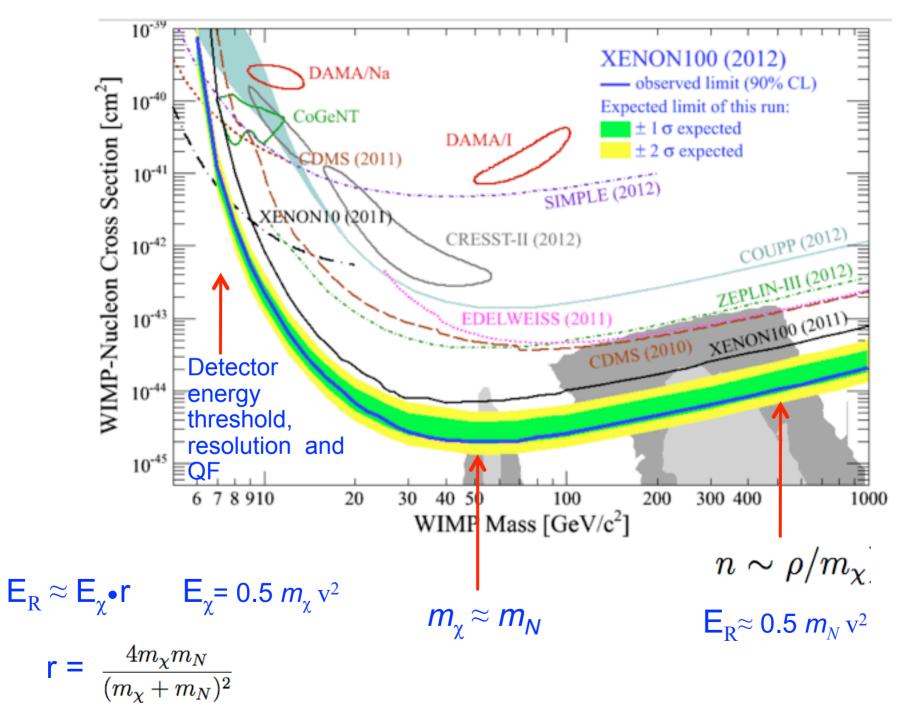

Next generation WIMP frontier

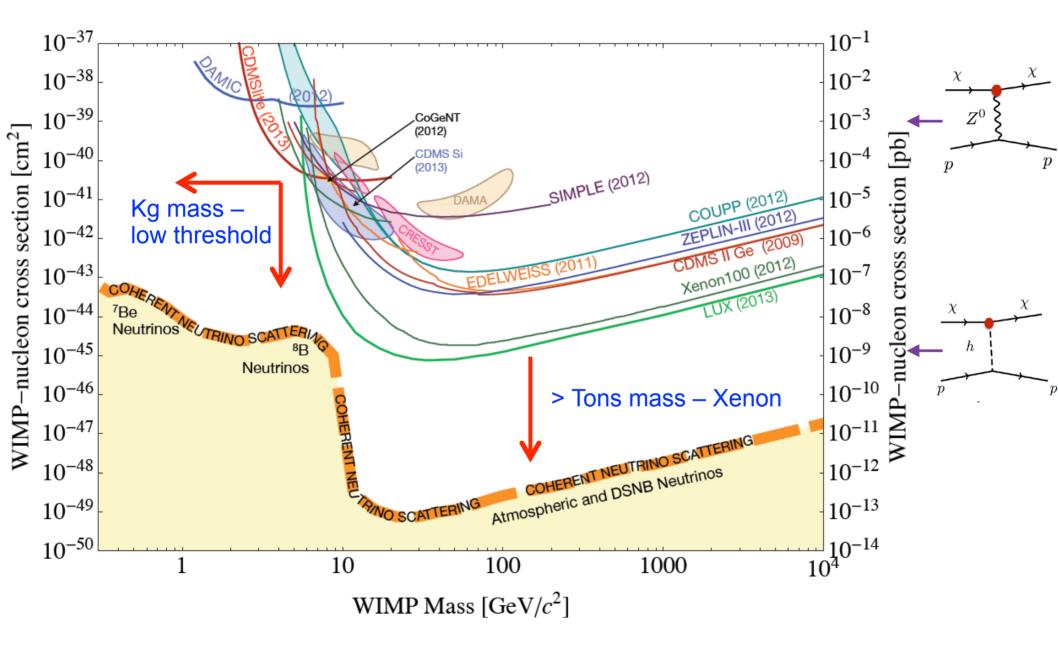

Beyond the WIMP paradigm

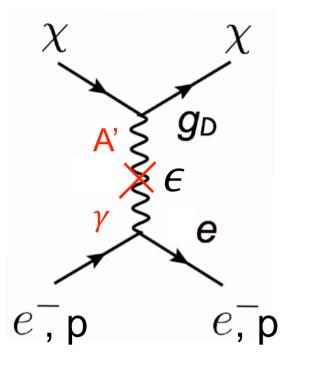

"Dark QED" models

kinetically mixed hidden photon A'

$$\epsilon e A'_{\mu} J^{\mu}_{
m EM}$$

 $\bar{\sigma}_{e} pprox_{c} \alpha \epsilon^{2} \alpha_{D}$ x kinematic terms

 A rich, unexplored DM phenomenology : A' massive or light, χ (elastic) scalar, Dirac fermion; (inelastic) scalar, Majorana fermion

Nuclear recoils

 $m_{\chi} \approx few GeV$


 $E_{R} = \frac{1}{2} m_{\chi}^{2} v_{o}$ $\approx 1 \text{ keV}_{nr}$

(+ quenching factor)

 Electron recoils: the e⁻ (not χ) sets the typical momentum transfer


 $v_e \sim \alpha \gg v_o \sim 10^{-3}$ (outer shell electron) $q_{\rm typ} \simeq \mu_{\chi e} v_{\rm rel} \sim \alpha m_e \sim 4 \ {\rm keV}$

(does not depend on m_{γ} , can explore MeV DM masses!) 8

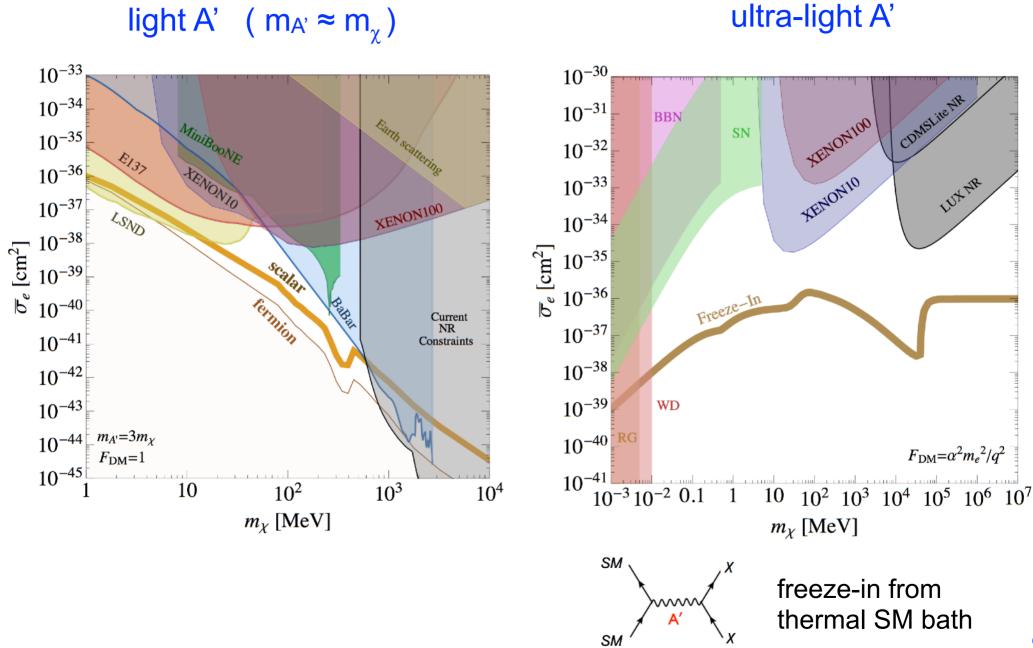


Charge-Coupled-Devices




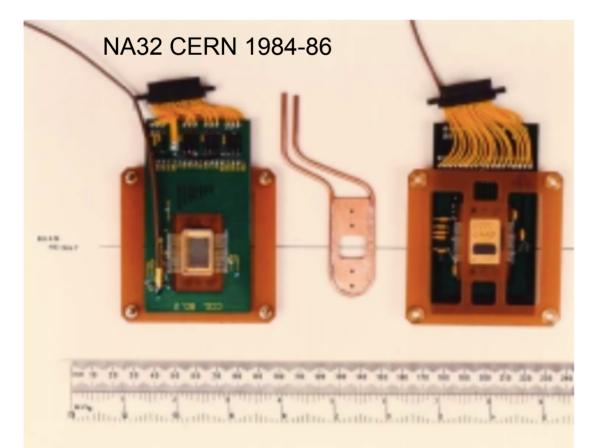

Dark Energy Survey Camera

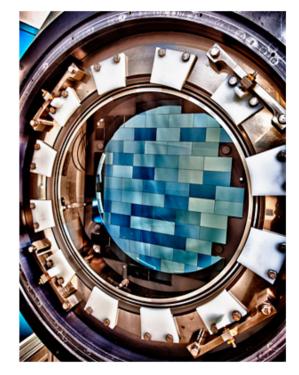

 $250 \ \mu m$ thick CCDs with enhanced IR sensitivity developed at LBNL

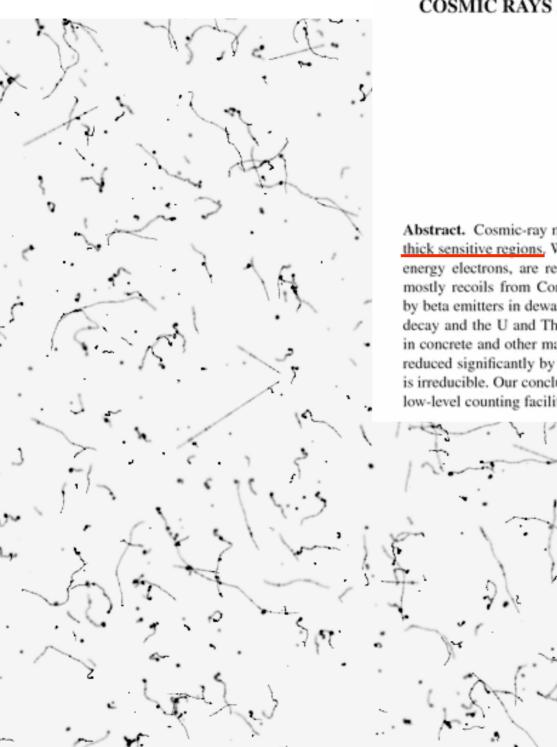

COSMIC RAYS AND OTHER NONSENSE IN ASTRONOMICAL CCD IMAGERS


DON GROOM Lawrence Berkeley National Laboratory

(Accepted 23 July 2003)

DAMIC enabled by

Abstract. Cosmic-ray muons make recognizable straight tracks in the new-generation CCD's with thick sensitive regions. Wandering tracks ('worms'), which we identify with multiply-scattered low-energy electrons, are readily recognized as different from the muon tracks. These appear to be mostly recoils from Compton-scattered gamma rays, although worms are also produced directly by beta emitters in dewar windows and field lenses. The gamma rays are mostly byproducts of ⁴⁰K decay and the U and Th decay chains. Trace amounts of these elements are nearly always present in concrete and other materials. The direct betas can be eliminated and the Compton recoils can be reduced significantly by the judicious choice of materials and shielding. The cosmic-ray muon rate is irreducible. Our conclusions are supported by tests at the Lawrence Berkeley National Laboratory low-level counting facilities in Berkeley and 180 m underground at Oroville, California.


How a CCD works

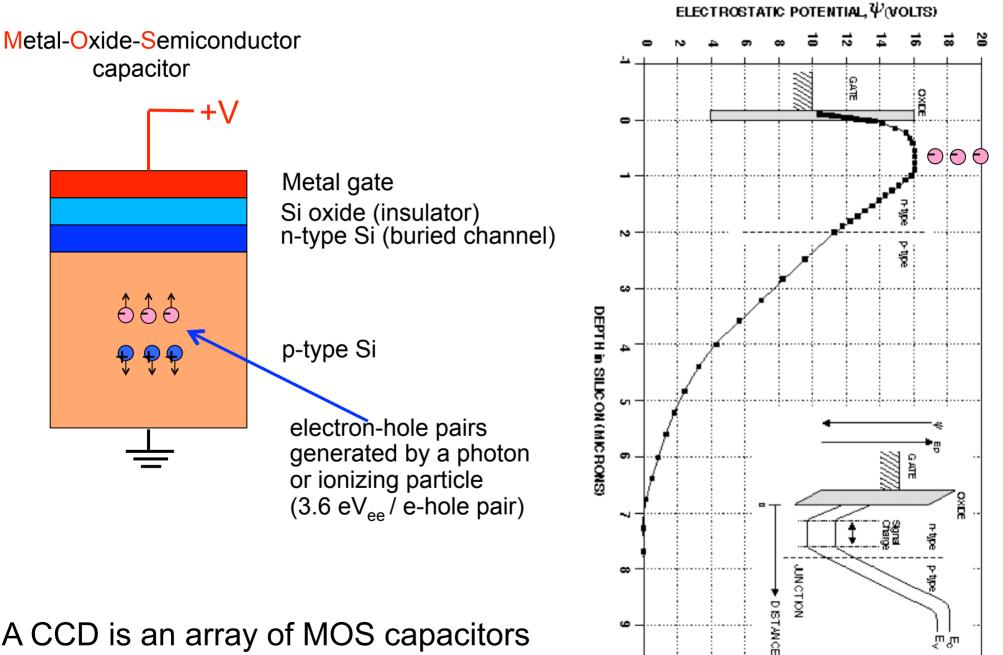


é

հա


A CCD is an array of MOS capacitors

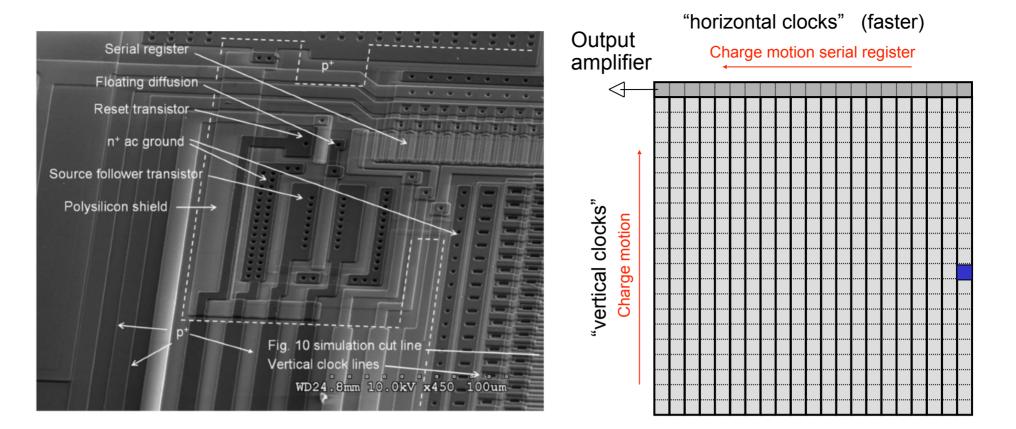


Charge transfer

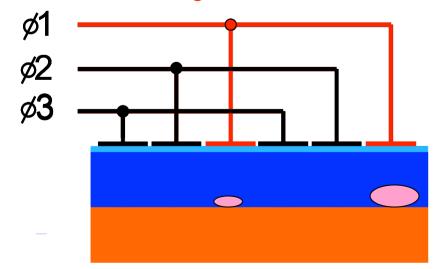


CCD in action

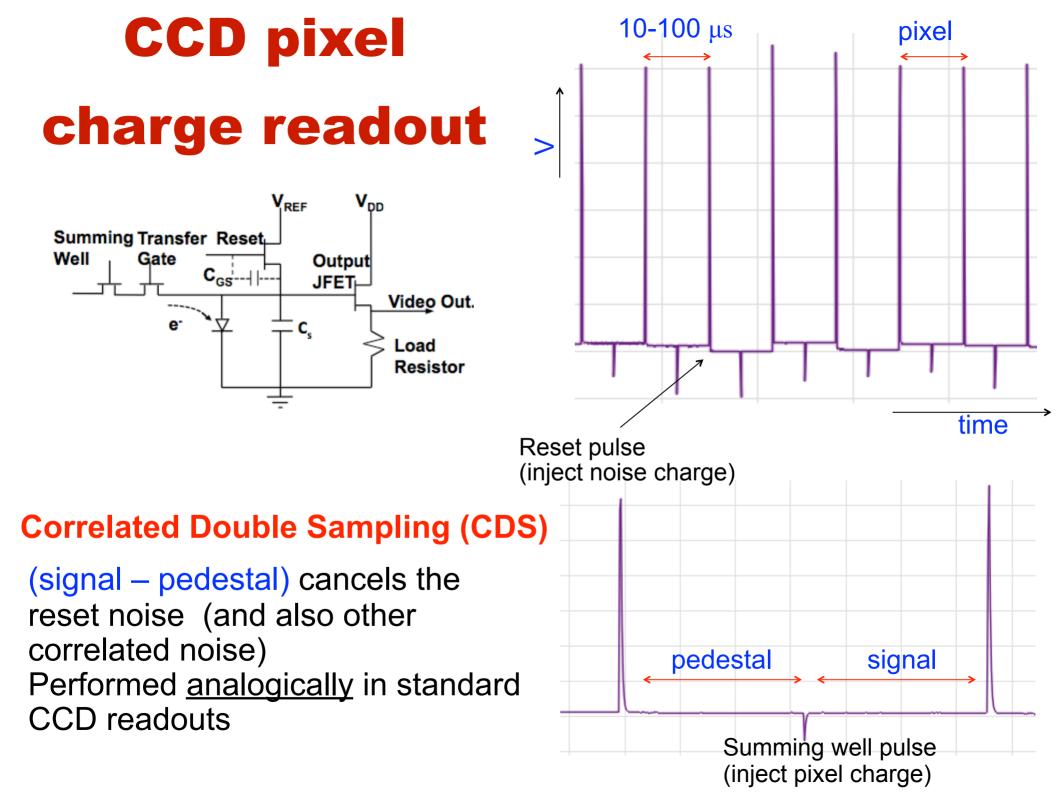

Why Dark Matter in CCDs ?

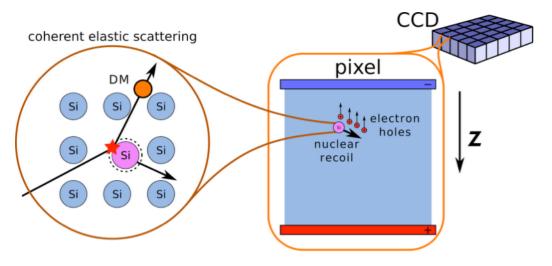


 High-resistivity (10¹¹ donors/cm³) extremely pure silicon

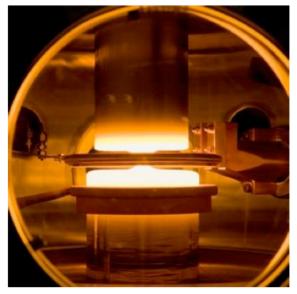


 Detection of point-like energy deposits from nuclear recoils induced by WIMP interactions (10 keV Si ion range 200 A)

2) Fully-depleted over several
 100s μm (typical CCDs few
 tens of μm)

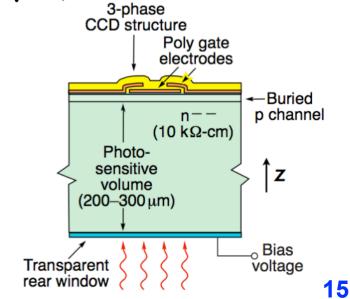

Float-zone Si

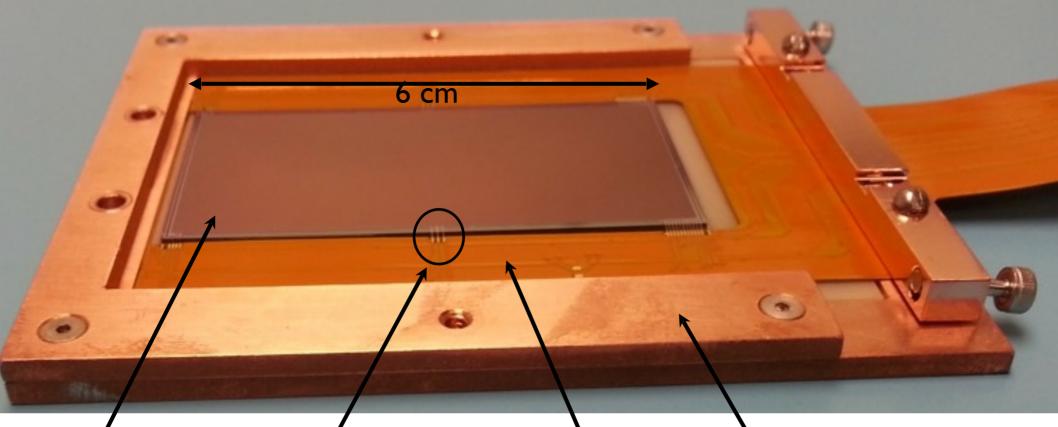



Clocks, Bias, Copper frame and Signal cable

3) Sizable mass


First DAMIC CCDs from DECam!

a DAMIC CCD 6 cm x 6 cm, 16 Mpixel (15 μ m x 15 μ m) has a record thickness of 675 μ m and 5.9 g mass


DAMIC100 currently taking data at the SNOLAB underground laboratory

4) Unprecedented low energy threshold


 Negligible noise contribution from dark current fluctuations (dark current < 0.001 e/ pixel/day with CCD cooled at 120 K). Readout noise dominant contribution.

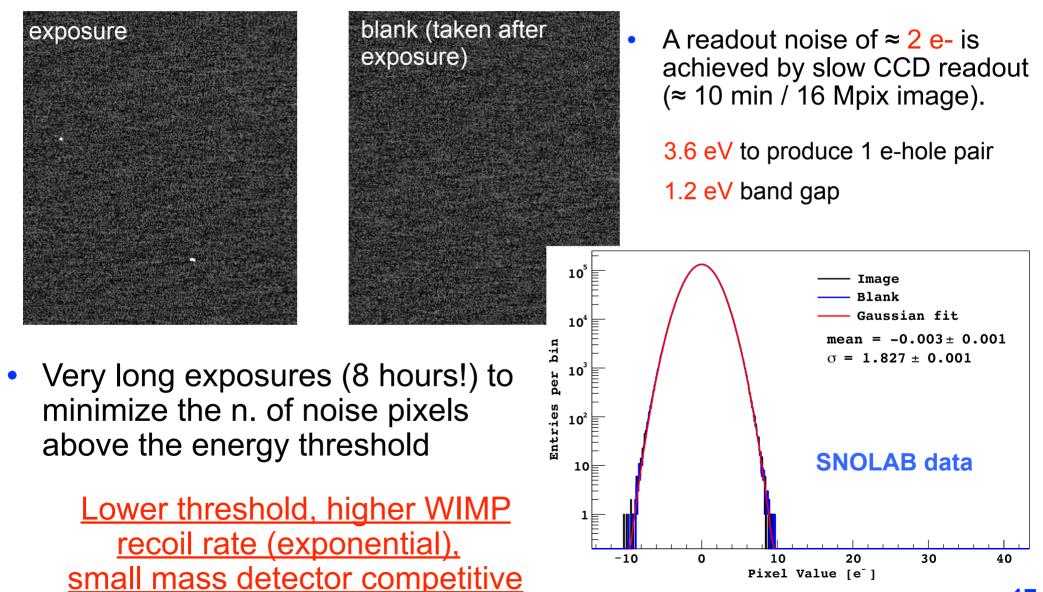



5) Unique spatial resolution: 3D position reconstruction and particle ID

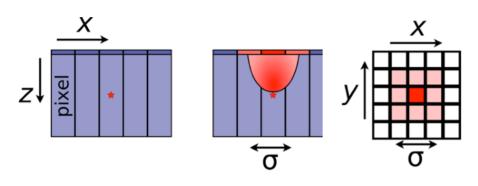

The charge diffuses towards the CCI pixels gates, producing a "diffusion-limited" cluster

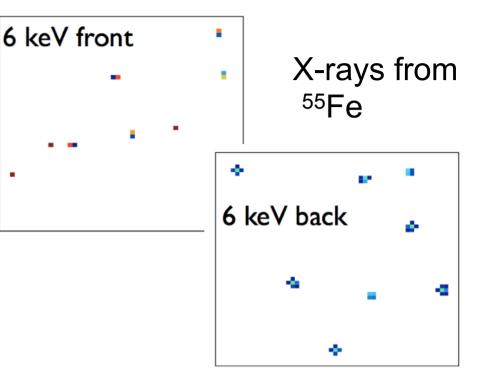

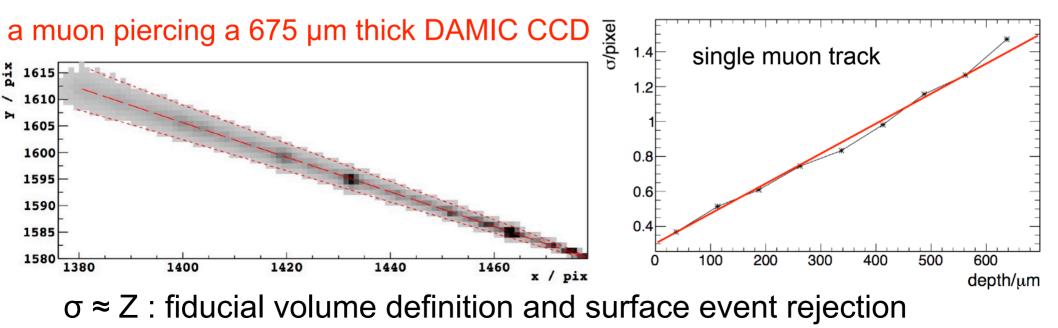

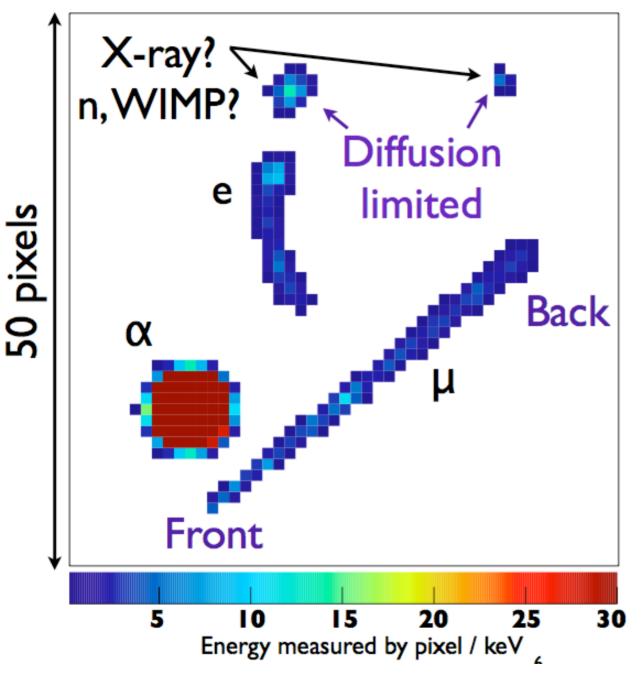

- "Worms" straggling electrons
- Straight tracks: minimum ionizing particles
- MeV charge blobs: alphas
- Diffusion-limited clusters: low-energy X-rays, nuclear recoils
- CCD spatial resolution provides a unique handle to the understanding of the background

SNOLAB Sudbury, Canada Nickel-Copper active mine

in the cage, dropping at 50 km/h

2 km underground

BBC documentary, Dancing in the Dark: the end of Physics








Abandon all hope, ye who enter here Inferno, Canto III, Dante




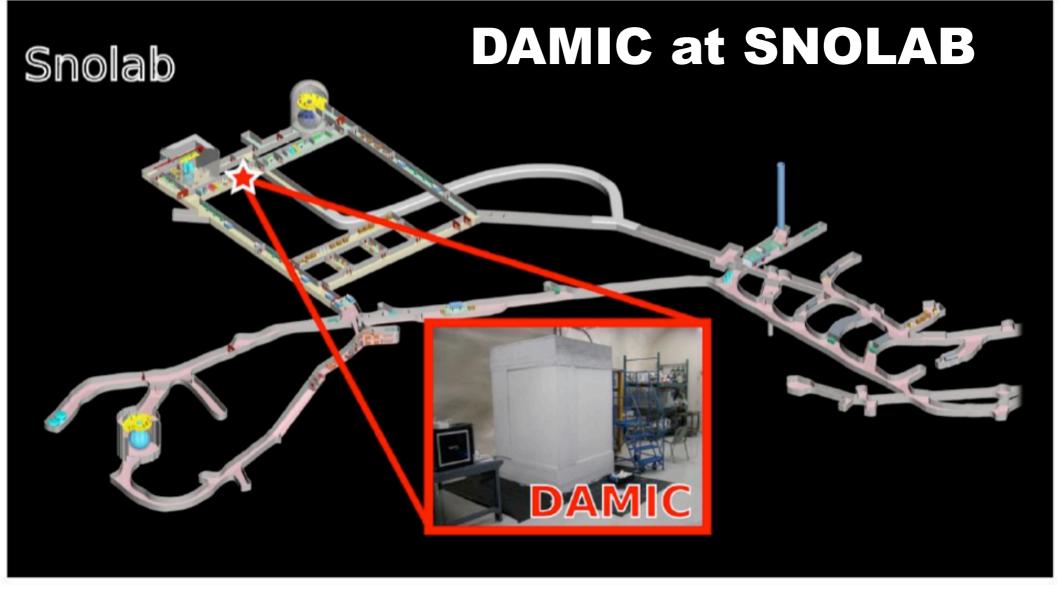


DAMIC R&D program in the J-Drift hall started in early 2013

CAB, FIUNA, Fermilab, LPNHE, SNOLAB, U Chicago, U Michigan, U Zürich, UFRJ, UNAM


DAMIC @ SNOLAB

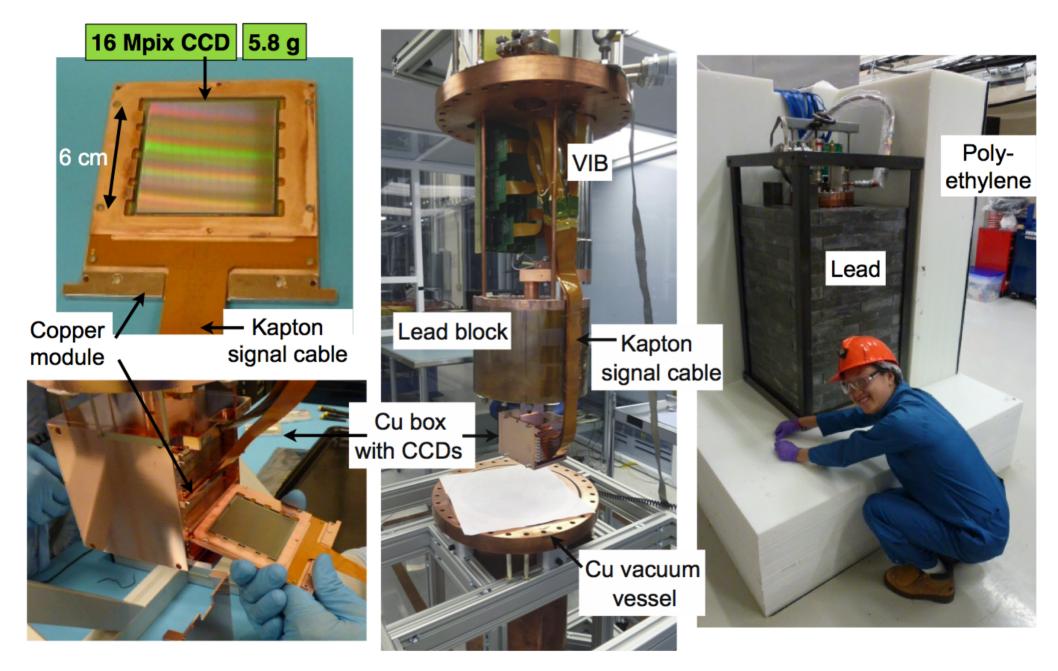


⁵⁵Fe source spectrum in Chicago chamber

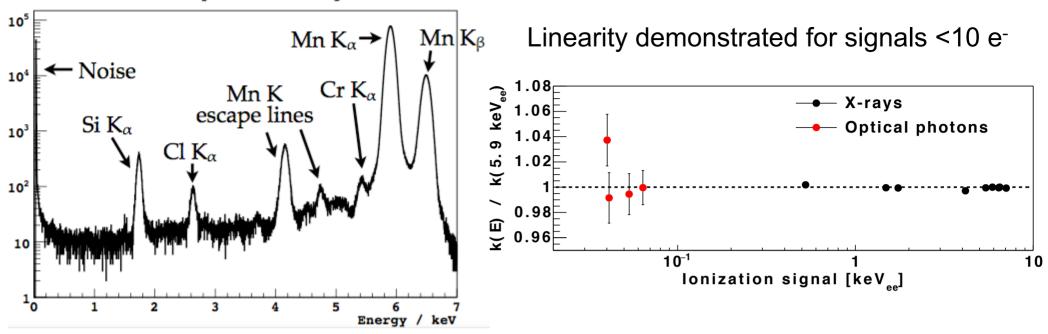


Response to electrons

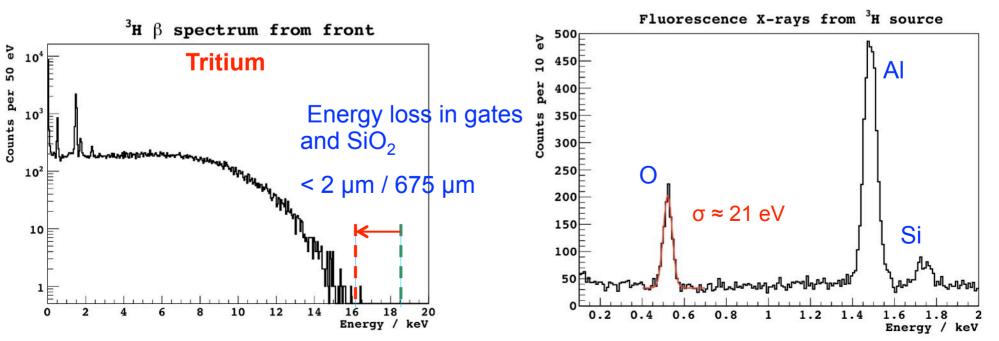


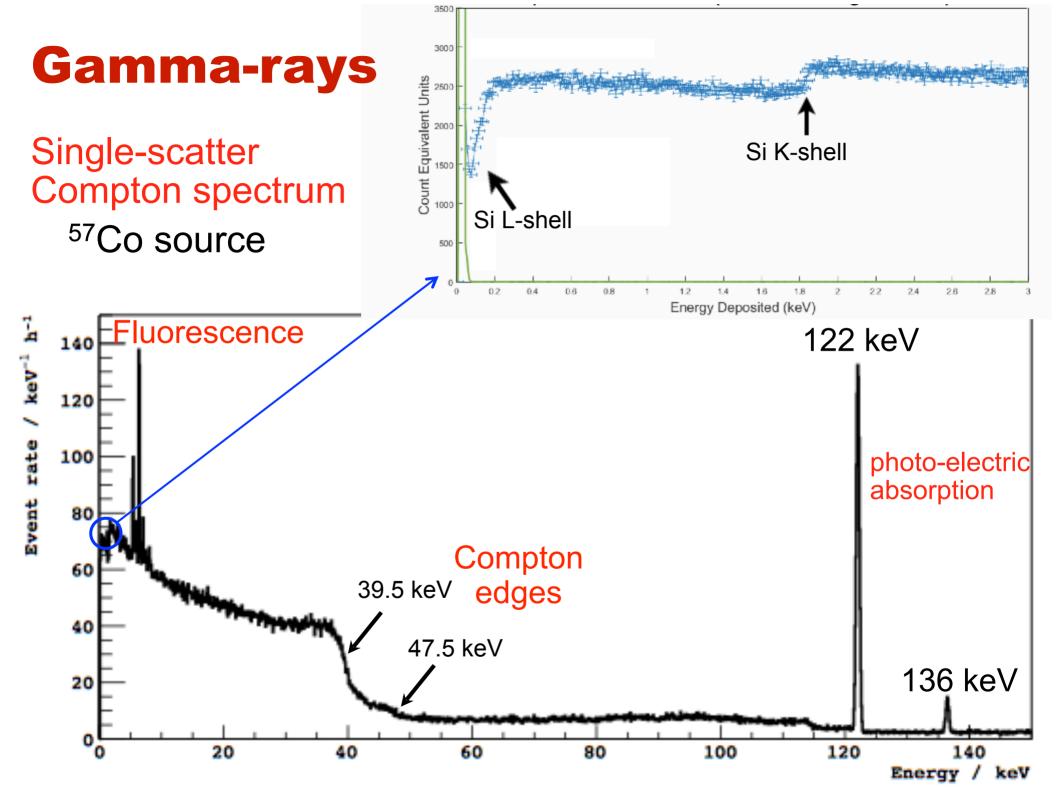

Nuclear recoil calibration

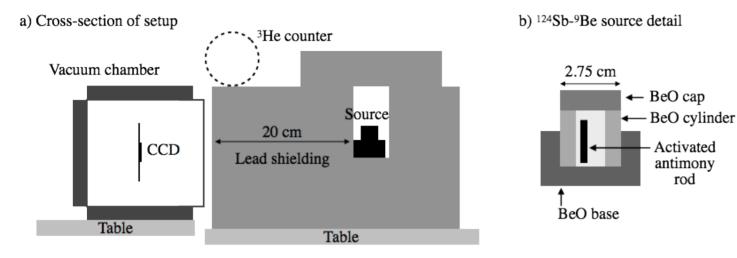



24 keV neutrons from ${}^9\text{Be}(\gamma,n)$ reaction

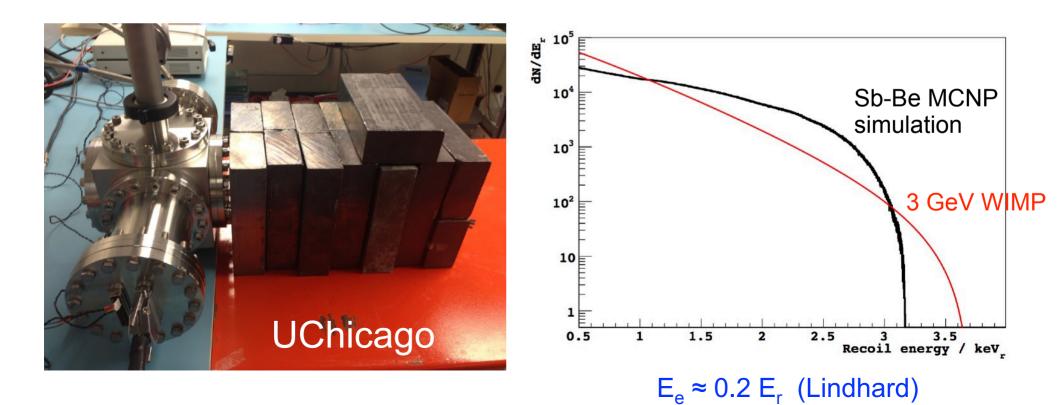

Nuclear recoil spectrum


 "Neutron-on" with BeO (n+γ)
 "neutron-off" with AI (only γ)
 Clear signal from neutroninduced nuclear recoils

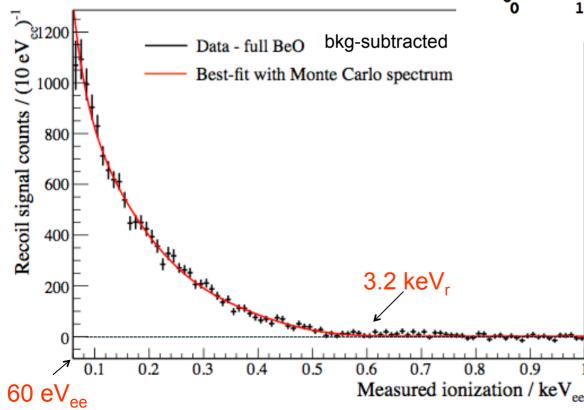

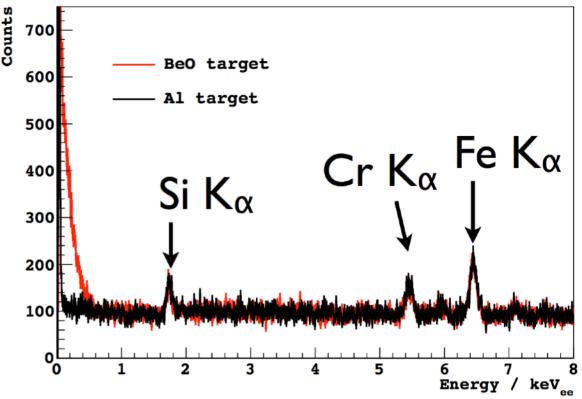

- Nuclear recoil ionization efficiency from adjusting MC E_r to E_e spectrum
- single recoil spectrum
- systematic uncertainties are small, dominated by 9% uncertainty on total predicted rate

Nuclear-recoil ionization efficiency in silicon

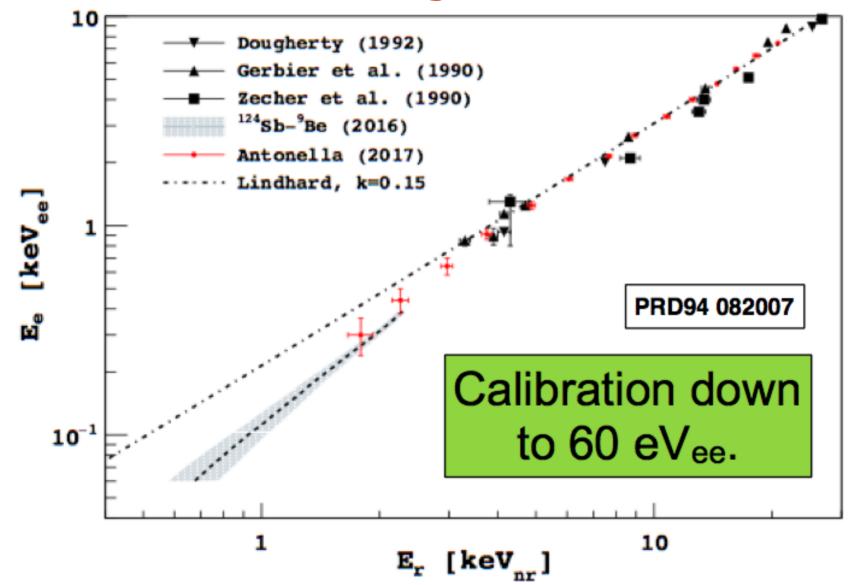


deviation from Lindhard theory observed – crucial for low-mass WIMP searches with silicon detectors


Background, background, background

 Lead shielding to stop environmental γ rays

Inner 2" shielding made of ancient lead to avoid bremmstrahlung γ s from ²¹⁰Pb β -decay (22 yrs half-life)




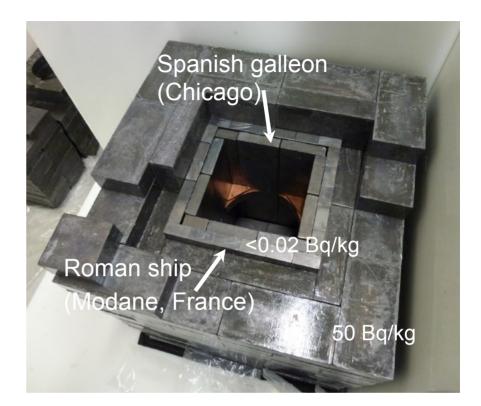

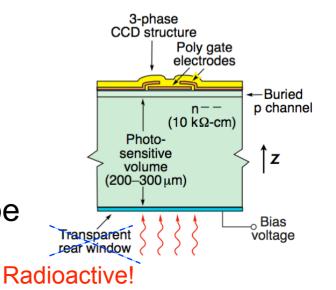

Background tour-de-force


- Since 2013 background reduced by >10³
- ≈ 5 dru achieved before DAMIC100 installation (similar to competitors)

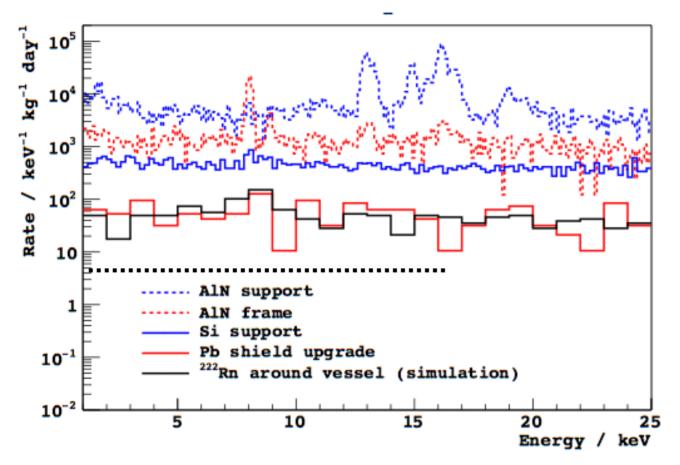

 Background rate may be smaller in DAMIC100: new CCD box and packages, roman lead In the last year:


- Seven interventions at SNOLAB.
- Nitrogen purge installation (Radon).
- Improvements in treatment of copper surfaces.
- Suppression of background from thermal neutron captures in copper.
 Mitigation of
 - background from condensation e.g. ³H.

DAMIC background characterization

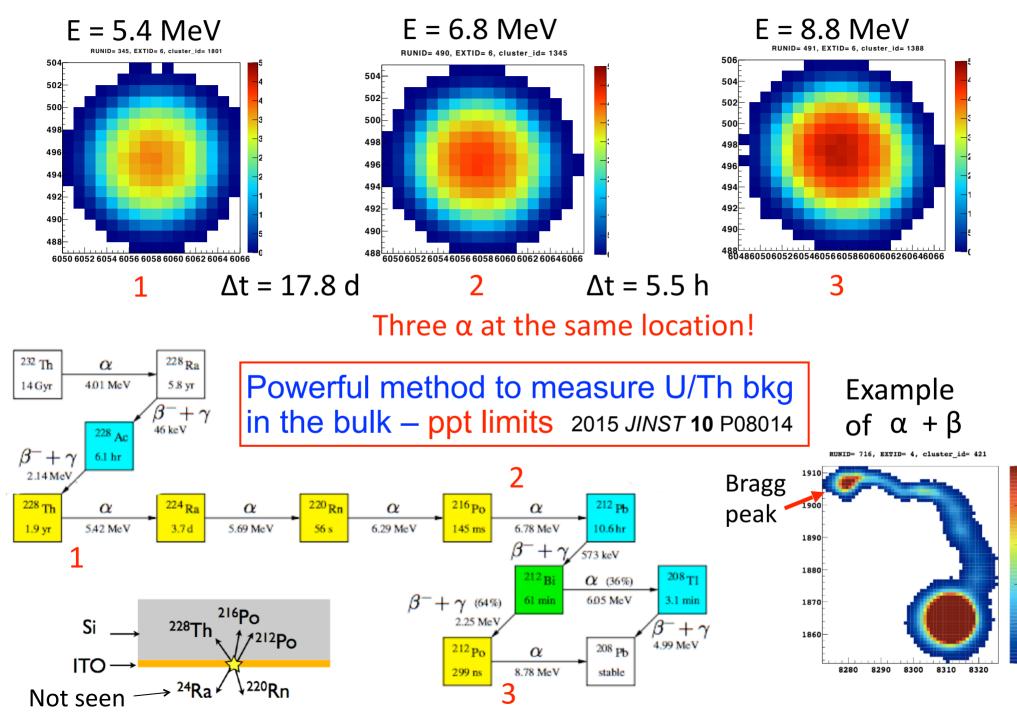


Dark Matter search with R&D data

- R&D focused on background reduction and CCD operation.
- We also took a small amount of data to be used for a first limit. Background ≈ 30 dru (now 5 dru!). Exposure ≈ 0.6 kg day. Goal: develop search tools and demonstrate CCD science potential
- Part of exposure (0.23 kg day) taken with hardware binning

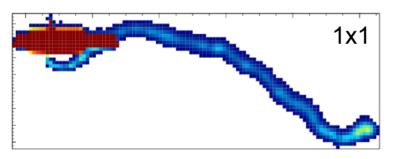


 α - β events

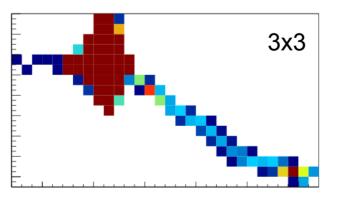


charge of several pixels can be added together before moving it to the readout node


some loss of spatial resolution but improved signal to noise (same readout noise but more charge in a binned pixel)

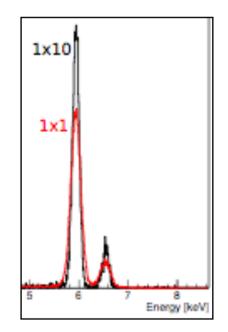

⁵⁵Fe source: improved energy resolution

Dark Matter search with R&D data

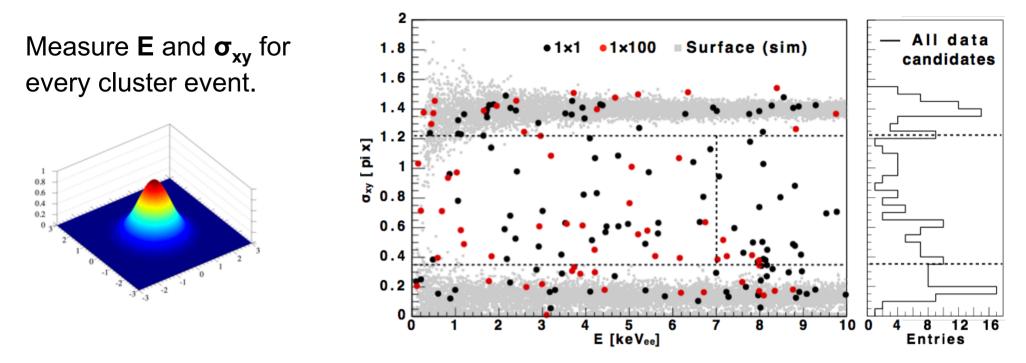


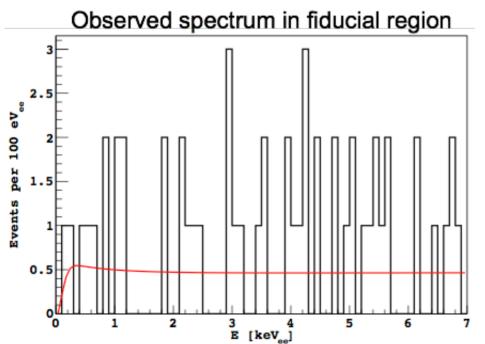


Spectrum consistent with Compton scattered electrons in fiducial region:

No WIMP signal


Exclusion limit

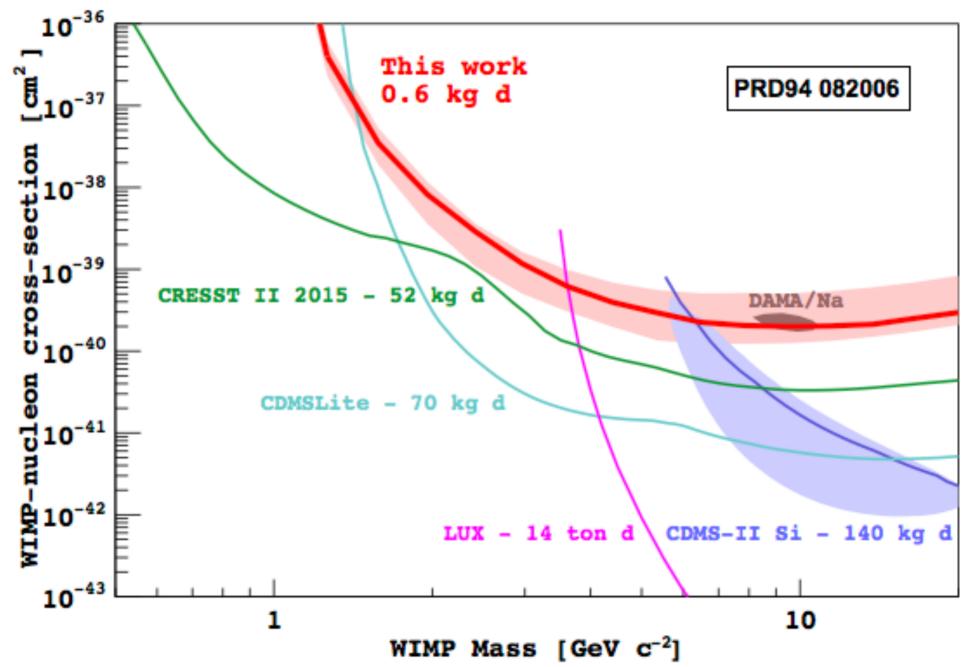

Hidden photon DM search

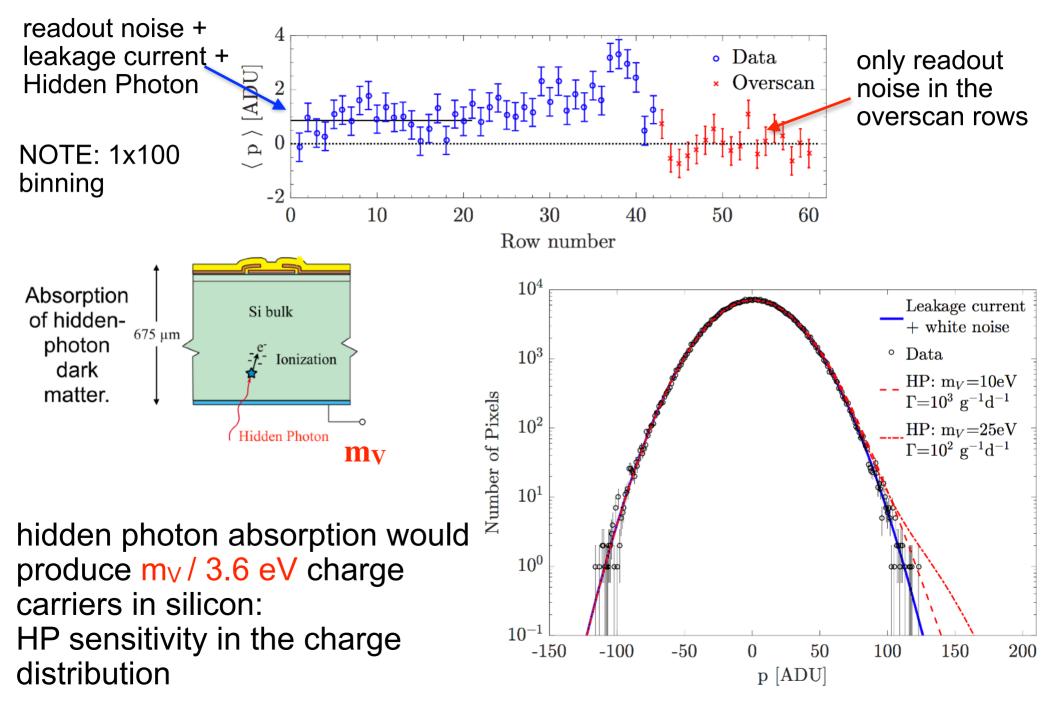

Hidden photon limit

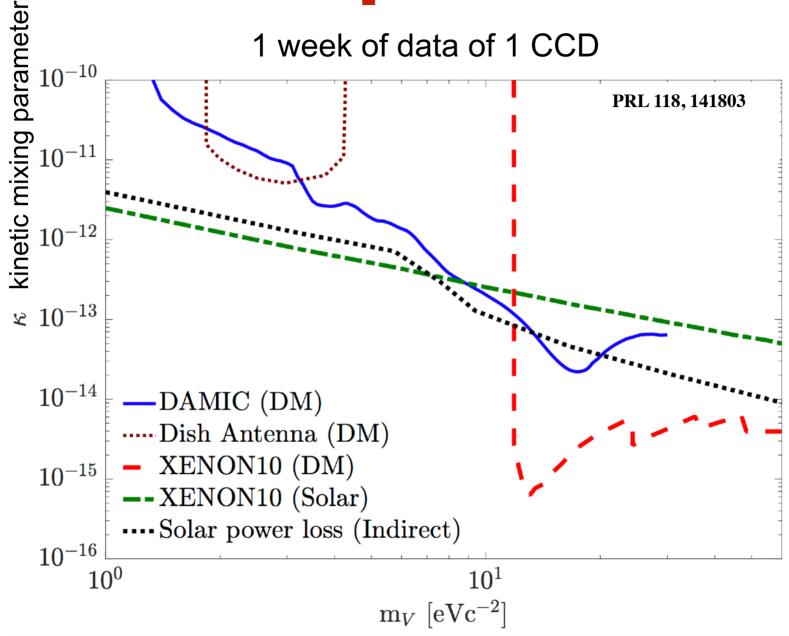

10⁻²¹ A/cm² !

Lowest leakage current ever achieved in a Si detector


DAMIC now

- Already achieved radioactive background (5 dru) and a low threshold (≈10 e-) performance.
- Stack of 16 Mpixel CCDs: DAMIC100 in current SNOLAB vacuum vessel and shielding.
- Installation took place in January, results with ≈ 10 kg day of data expected in 2017.
- Ongoing R&D for thicker, larger-area CCDs for a lower-noise, lower-background kg-size detector.

DAMIC-1K


- A kg-size experiment with 0.1 dru background and ≤ 2e- threshold
- To lead the exploration of WIMPs and dark sector candidates in the low-mass DM parameter space

DAMIC-1K and WIMPs

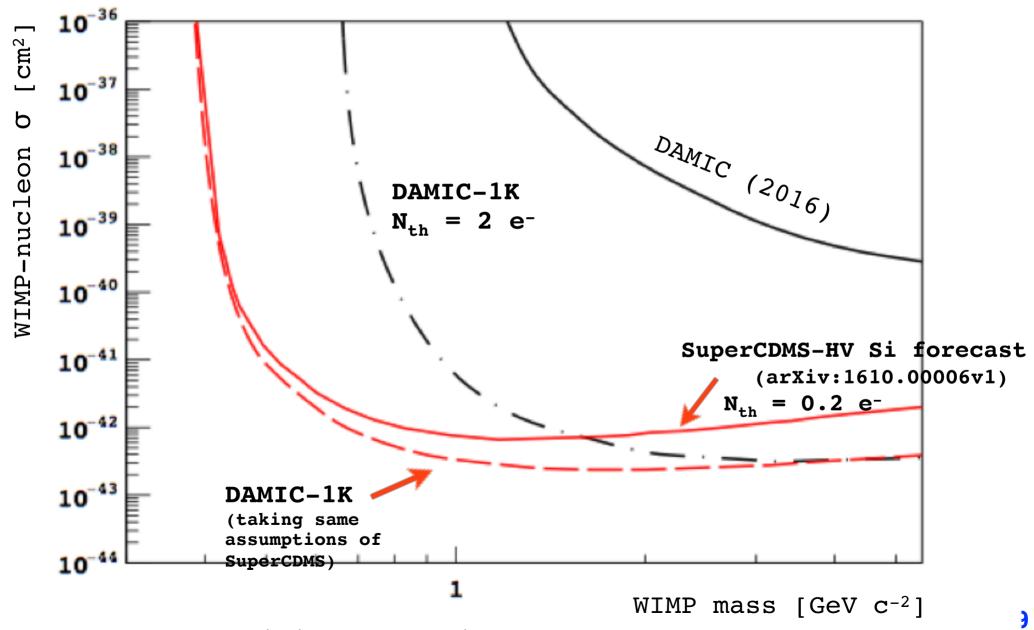


DAMIC-1K not limited by ³²Si bkg.


DAMIC-1K and dark sector

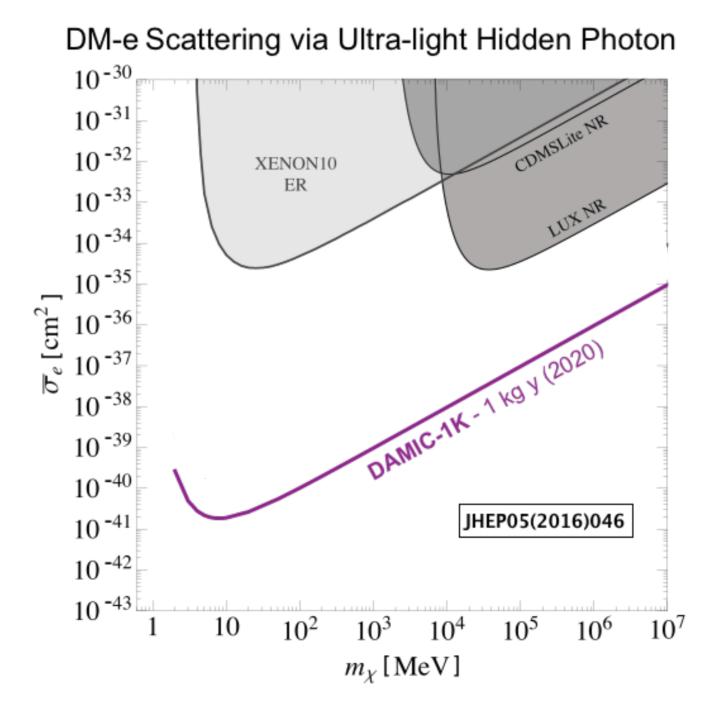

DANIC-1K and dark sector All Experiments (Kinetic Mixing + Elastically Coupled DM)

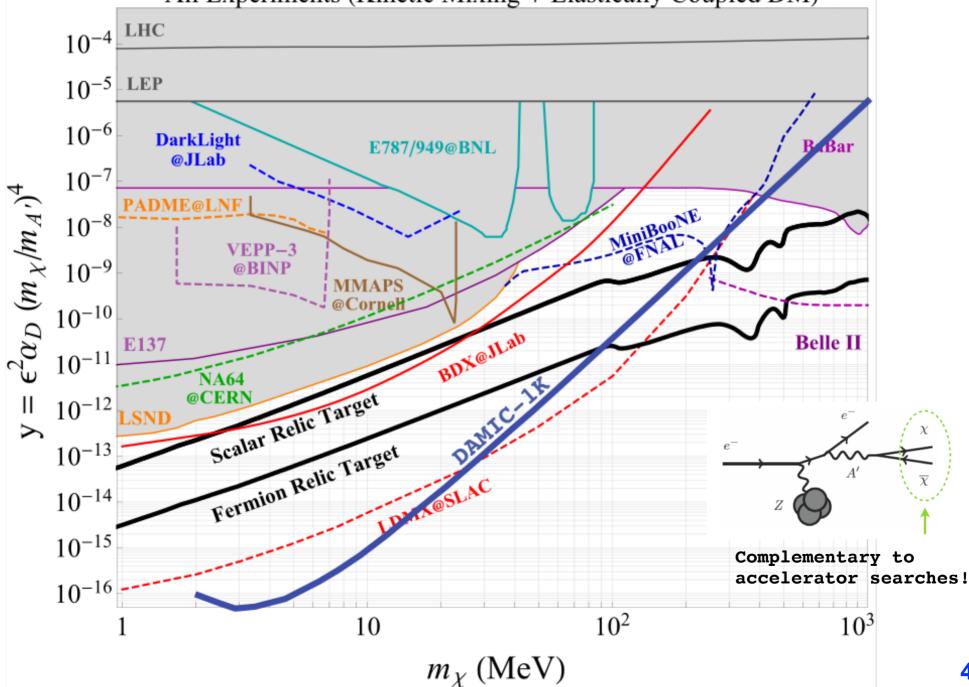


DAMIC-1K and dark sector

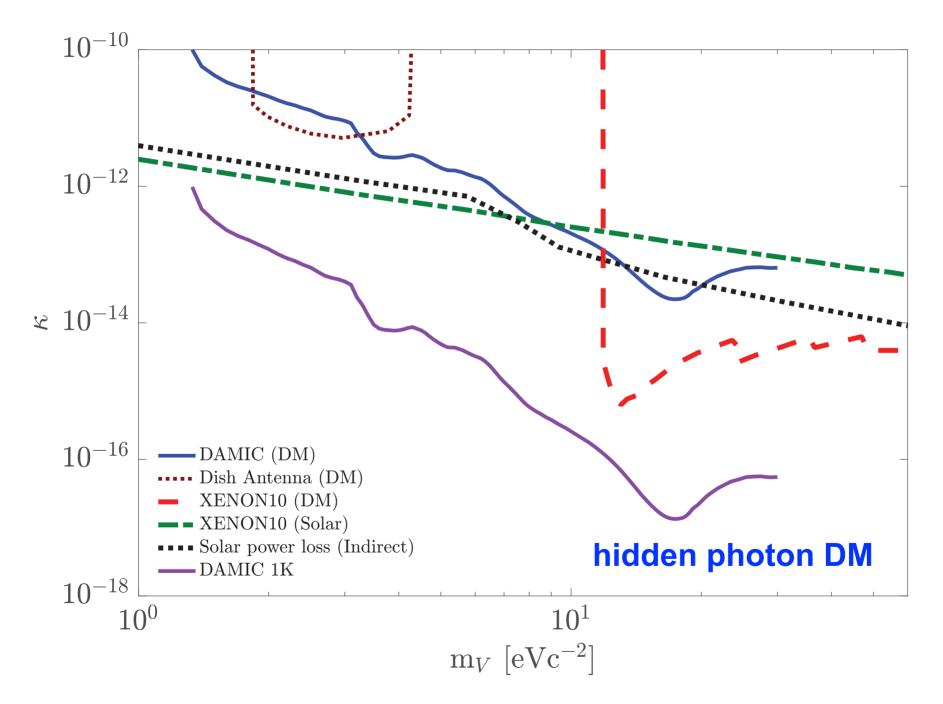

DAMIC-1K technical challenges

• A kg-size DAMIC can be built with the existing technology

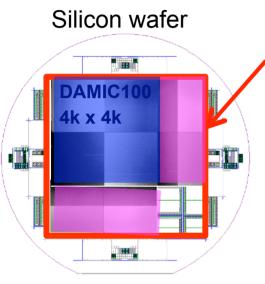

6k x 6k pixels, 1 mm thick

≈ 20 g / CCD

≈ 50 CCDs / 1 Kg

DALSA has confirmed the feasibility fabrication of these larger and thicker CCDs

Background

from a few dru to a fraction of dru.


<u>external bkg.</u>: improved design, materials (e.g. electroformed copper), strict procedures (silicon storage underground, radon, surface contamination)

internal bkg.: cosmogenic ³²Si (in the amosphere) and tritium (in the silicon)



DAMIC-1K background


 Cosmogenic ³²Si rate has been measured by DAMIC to be 80/kg/day and will be accurately measured by DAMIC100

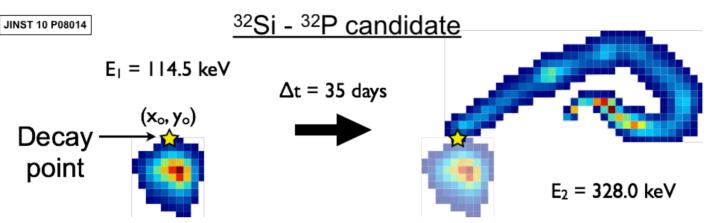

≈ 1 dru (dominant bkg. in SuperCDMS); rejected in DAMIC-1K by spatial correlations

 Cosmogenic tritium expected to be the dominant bkg. for DAMIC-1K.

<u>A measurement of its rate may be</u> within reach of the current DAMIC detector at SNOLAB (so far only estimates are used for forecasts)

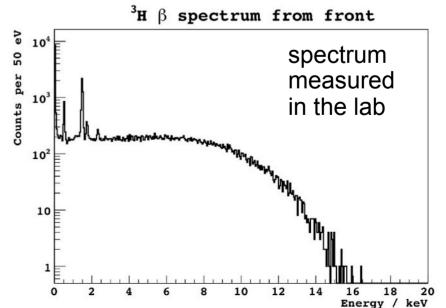


4


DAMIC-1K sub-e⁻ noise

Readout noise

After Correlated Double Sampling the noise is dominated by 1/f noise in the CCD amplifier

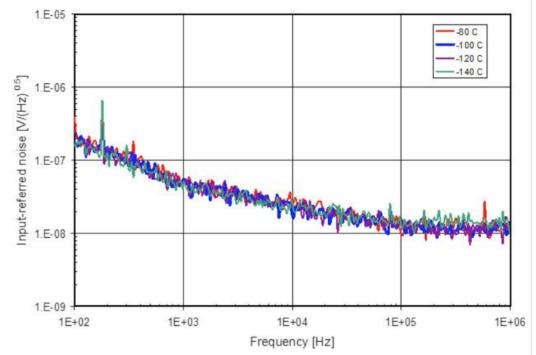

CDS transfer function

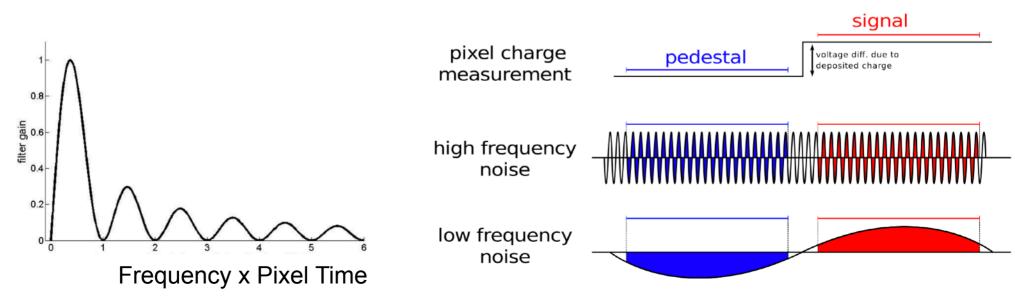



DAMIC-1K sub-e⁻ noise


Skipper readout

Non-destructive measurement of the charge!

Measure the charge fast (kill 1/f noise) and N times (noise $\approx 1/\sqrt{N}$)

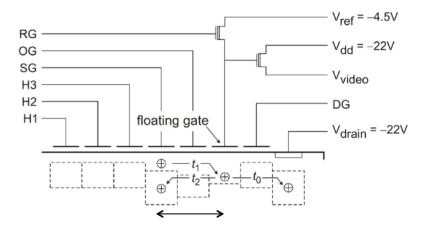

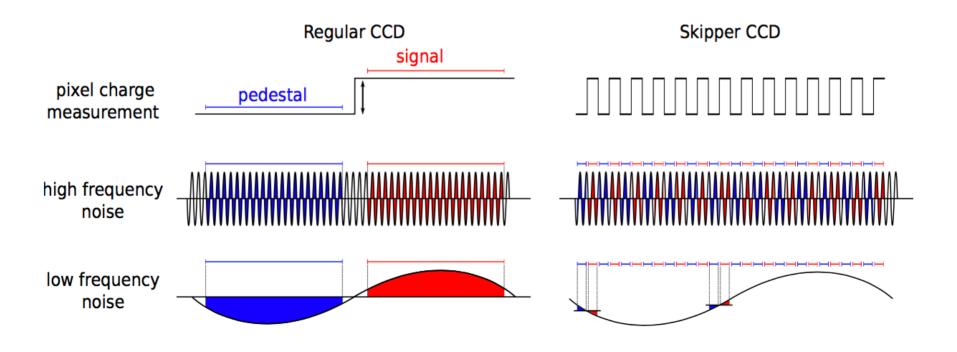

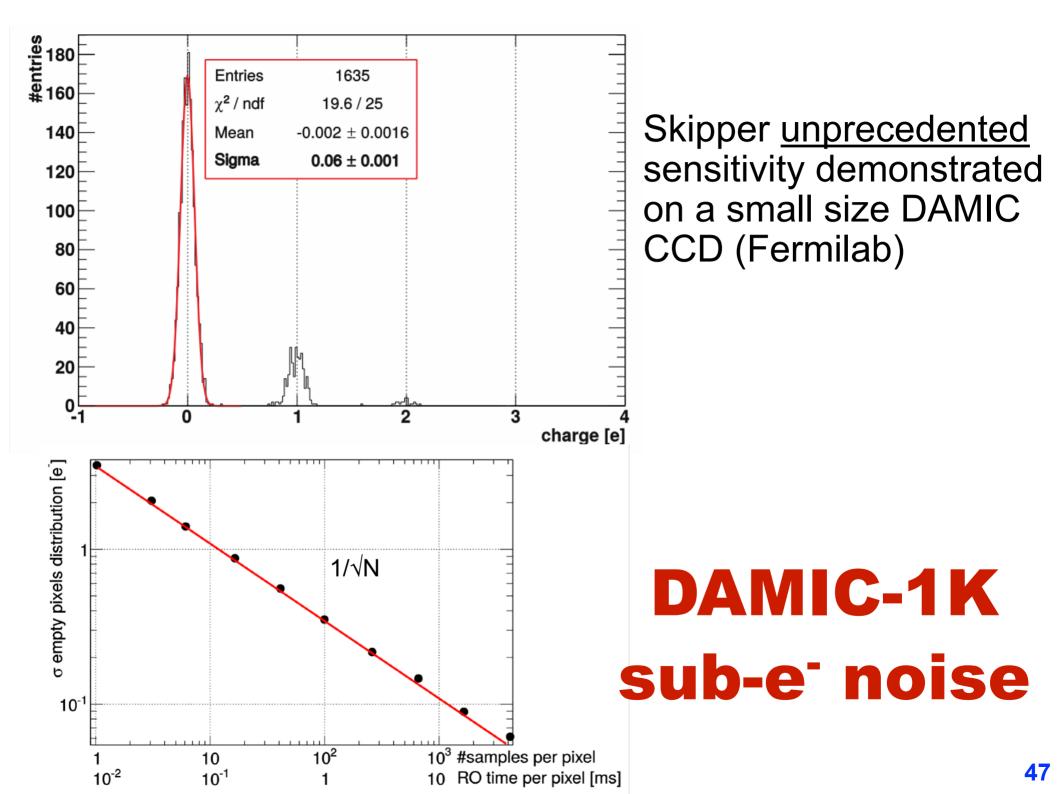

Potential applications and ongoing R&D

<u>Nuclear forensics</u>




the analysis of nuclear materials recovered from either the capture of unused materials, or from the radioactive debris following a nuclear explosion, to identify of the sources of the materials and the industrial processes used to obtain them.


Our CCDs can provide:

 <u>fast</u> identification of hot particles in swipes (for subsequent analysis)

- <u>non-destructive</u> analysis through gamma, beta and alpha spectroscopy
- Identification of a <u>single</u> nuclide

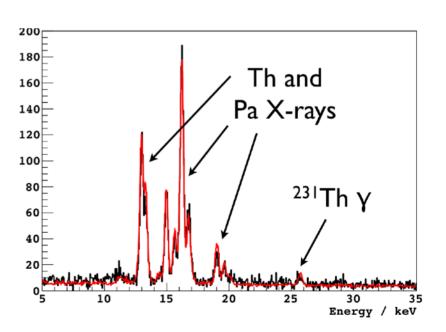

• Soft Error Rate (SER)

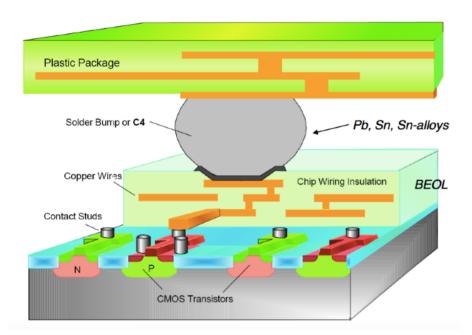

Errors in computer chips (memory & logic) that do not cause permanent damage

Induced by passage of energetic ionizing radiation through the sensitive volume of chips

Can be a major reliability problem in servers, laptops, smart phones, pacemakers, electronics

Alpha particles from chip packaging (ceramic, underfill, interconnects, contamination)

More and more important with scaling of technology (shrinking dimensions)

Reliable measurements of ultra-low alpha emissivity required

We have measured emissivity of many materials (e.g. copper, silicon, ancient lead, kapton, epoxy, etc.) down to 0.2α / (khr cm²) with properties unique to our CCDs: capability to locate the origin of the emission; alpha identification even with degraded energy; detection of beta and gamma in addition to alpha particles



- In the last two years DAMIC has established the CCD technology as a competitive technique for the search of low-mass Dark Matter particles
- DAMIC-1K, a kg-size CCD detector with low background and subelectron noise, will explore a new large parameter space, scrutinizing the WIMPs paradigm, as well as dark sector candidates with sensitivity comparable to accelerator searches
- The DAMIC-1K detector is an incremental step of proven technologies (larger size CCD, sub-electron noise). It will work as specified.
- DAMIC-1K possible locations: SNOLAB (Canada), Modane (France), SURF (USA), Gran Sasso Laboratory (Italy)
- The CCD technology developed for DAMIC has wider applications: coherent neutrino scattering, nuclear forensics, soft errors