Electronics of the Telescopes

- **Computer controlled DAQ parameters:**
  single pixel trigger threshold and HV supply;
  en/disable pixels and NN check for trigger;
  N/271 pixels, M/4 telescopes trigger condition;
  switching single telescope/system trigger;
  slow control, i.e. steering of telescope,
  main HV, camera lid, CCD camera
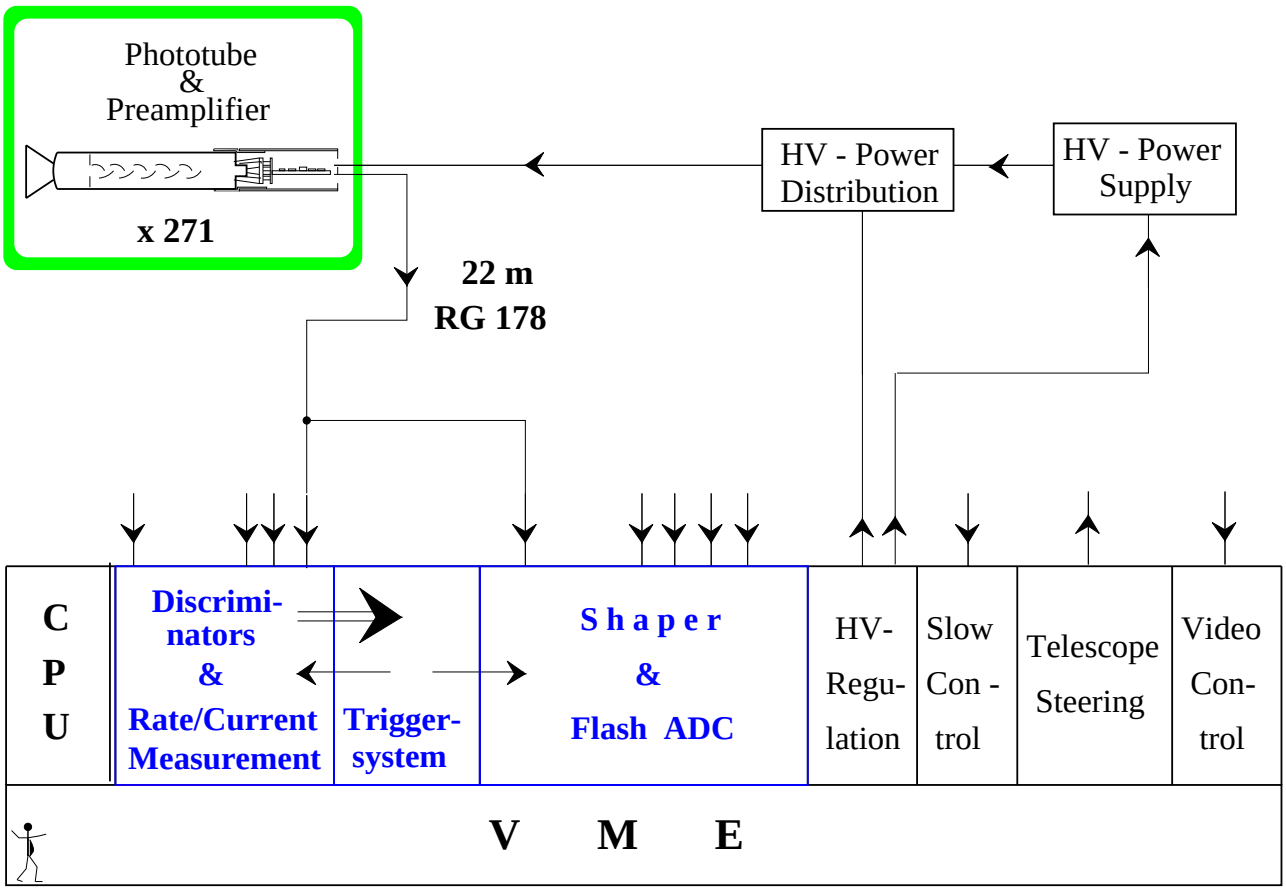
- **Computer monitored DAQ Parameters:**
  single pixel trigger rates and PMT DC currents;
  telescope trigger rates; slow control